

Are Chemical Constituents Exhaled in a Room Where e-Vapor Products are Used?

Mohamadi Sarkar¹, Jianmin Liu¹, Qiwei Liang¹, Xuejun Peng¹, Michael Oldham¹, Ali Rostami¹, Karl Wagner¹, Gene Gillman², and Anne Marie Salapatek³

¹Altria Client Services LLC, Richmond, VA USA. ²Enthalpy Analytical Inc., Durham, NC USA. ³Inflamax Research Inc., Toronto, Canada

69th Tobacco Science Research Conference
September 21, 2015




Altria

Altria Client Services

Passive Vaping Evidence Gaps

TOBACCO CONTROL

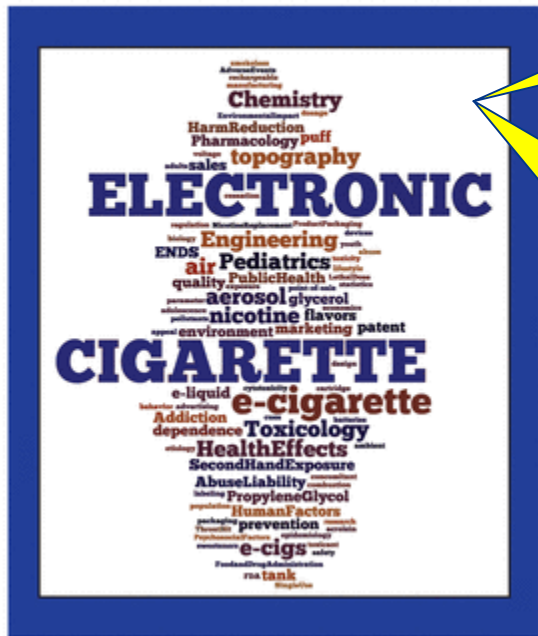

“Little is known about the environmental impact of e-cigarettes.”

“A study evaluating the indoor air quality in other various locations (e.g., car, home, office, school and public indoor areas such as transit stations) during and after e-cigarette use provides important information about environmental impacts. This information should be collected using a representative sample of the e-cigarette products currently available.”



Altria

Altria Client Services

Source: Hoshing Chang, Tobacco Control (2014), 23:ii54-ii58

Altria Client Services | Jianmin Liu, M.D. | 69th TSRC | 21 SEP 2015 | 2

Questions to be Addressed

- What are the levels of e-vapor constituents in room air where e-vapor products are used?
- What is the exposure to e-vapor constituents in non-users?
- If there is measurable exposure to e-vapor constituents in non-users, what is the potential for harm from this level of exposure?

ALCS Approach to Address These Questions

- Review and monitor published literature
- Conduct studies to generate data
 - Two initial pilot studies
 - Controlled clinical study
- Develop a computational model to predict air levels of e-vapor constituents under different conditions
- Assess risk to non-users based on evidence collected from studies and model based predictions

Study Design

Objectives:

1. To evaluate the exhaled breath, room air and surface levels of selected constituents following the use of various types of e-vapor products and conventional cigarettes under controlled and *ad lib* conditions.
2. To generate input parameters for validation of a computational model

■ Study Design

- Open-label, single-center, observational study

■ Study Participants (Total n=40)

- Healthy males and females, 21 years and older
- Current daily e-vapor users (n=20)
- Current daily refillable tank users (n=10)
- Current daily conventional cigarette smokers (n=10)

Study Design

■ Products Tested

- MarkTen® 2.5%^a Classic Electronic Cigarette (M10)
- Prototype Electronic Cigarette 2.4%^{a,b} (GS)
- Ego-Tank and subjects' own e-liquids (Tank)
- Conventional cigarettes, subjects' own cigarettes (CIG)

■ Investigations


- Exhaled Breath Samples (EBS)
- Room Air Samples (RAS)
- Surface Samples (SS)

^a Percent of USP grade nicotine w/w

^b Similar to commercial GreenSmoke® electronic cigarettes

Study Conduct

Exposure Room

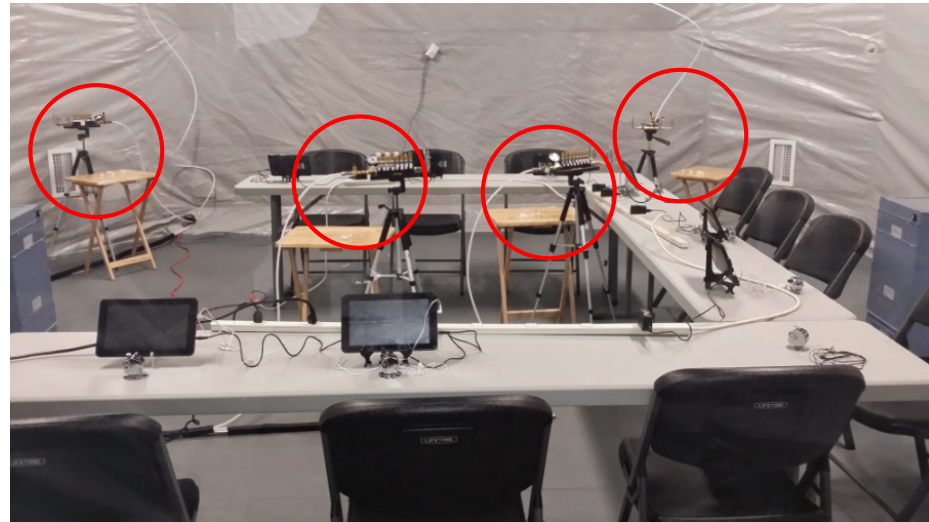

Volume 113 m³
Air exchange rate 2.25/hour



Clinical site for study conduct



Sample collection and analysis




Altria
Altria Client Services

Note: Third party trademarks and images are the property of their respective owners and are used for illustrative purposes only.


Altria Client Services | Jianmin Liu, M.D. | 69th TSRC | 21 SEP 2015 | 7

Sampling Stations

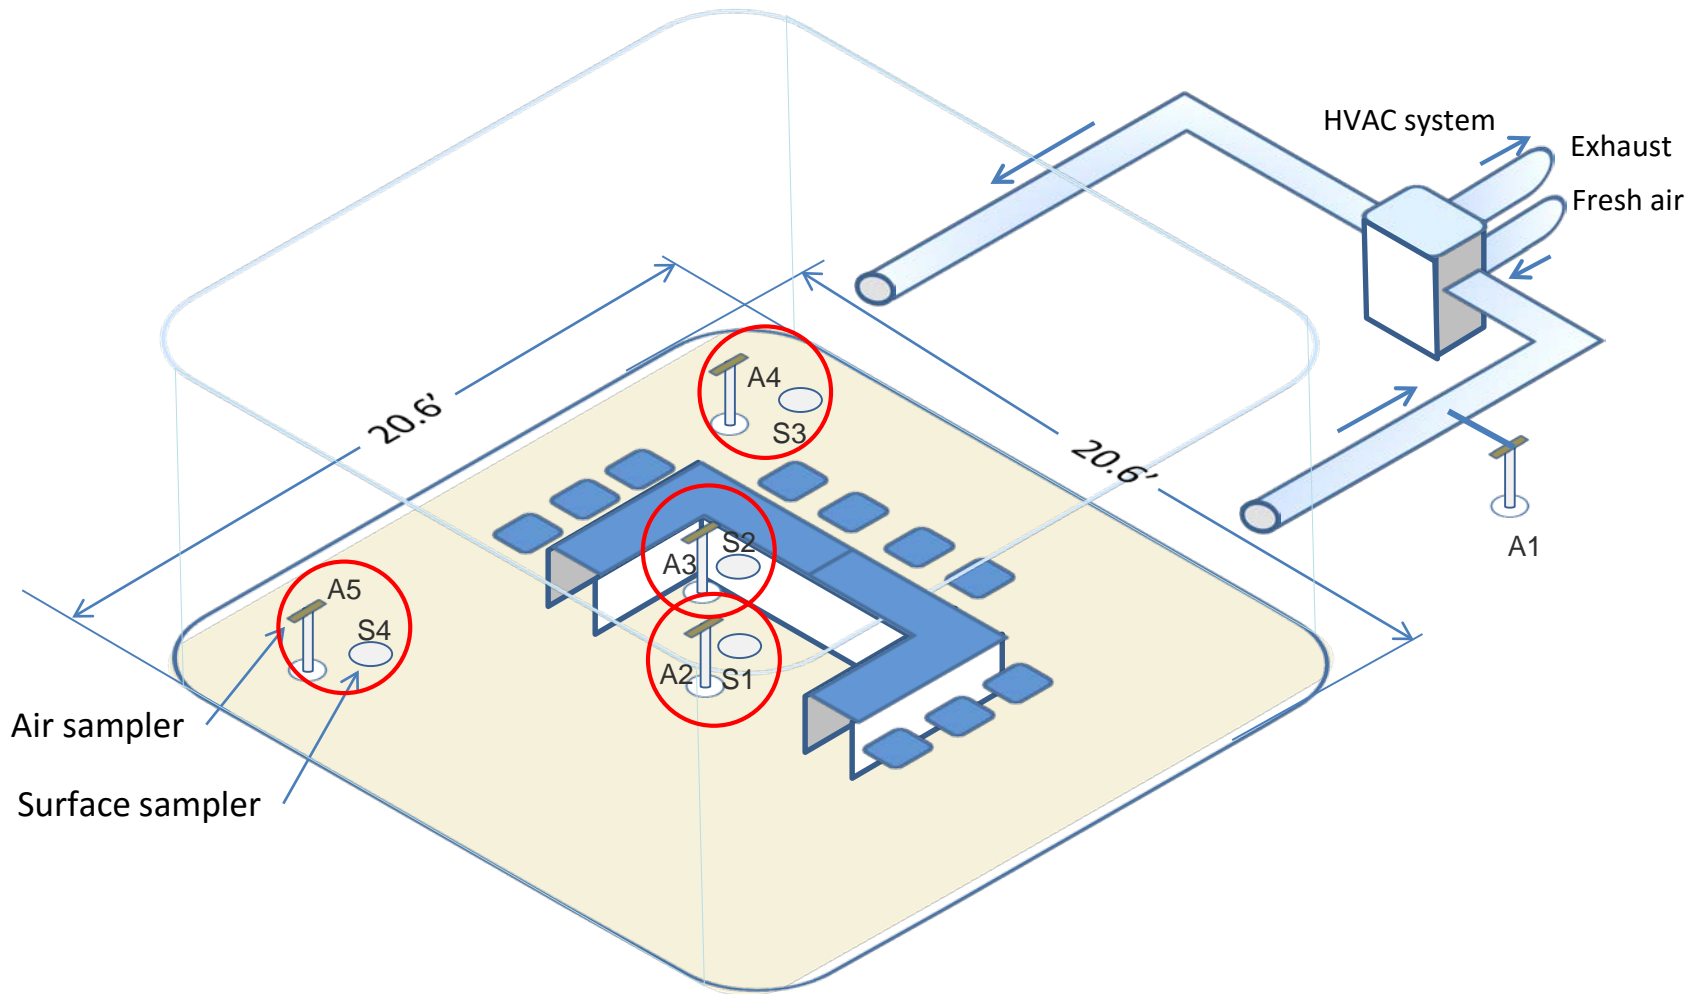


Sample Collection – M10 & GS

DAY 1

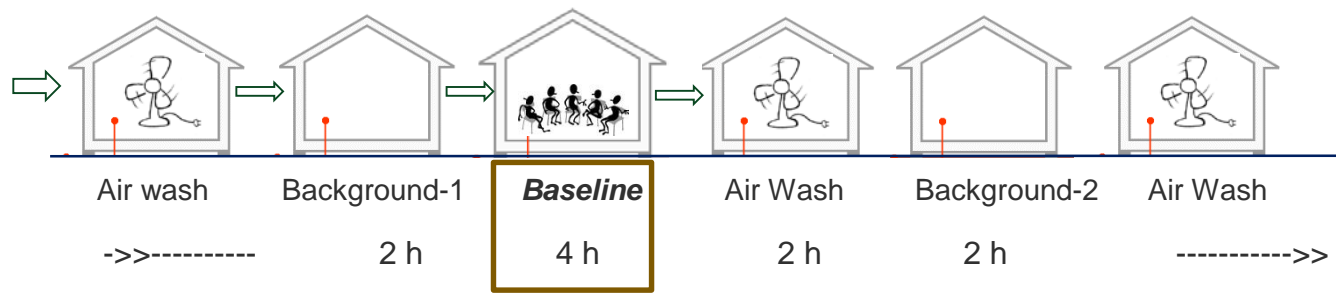


Sample Collection – M10 & GS

DAY 1

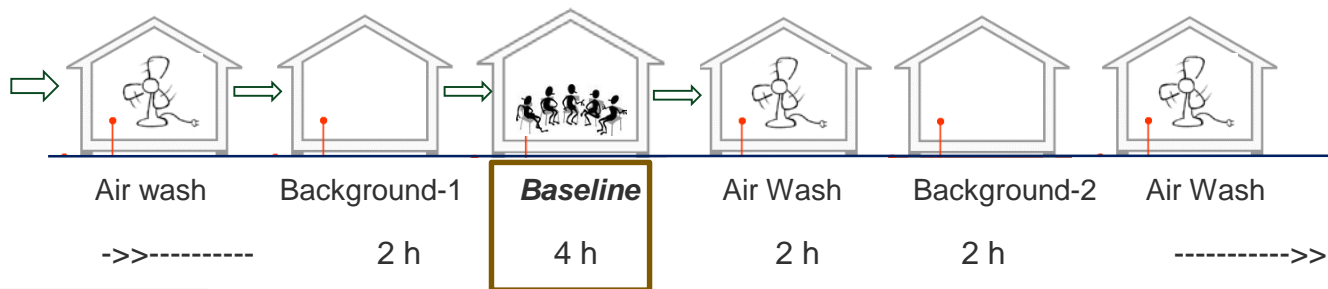

DAY 2

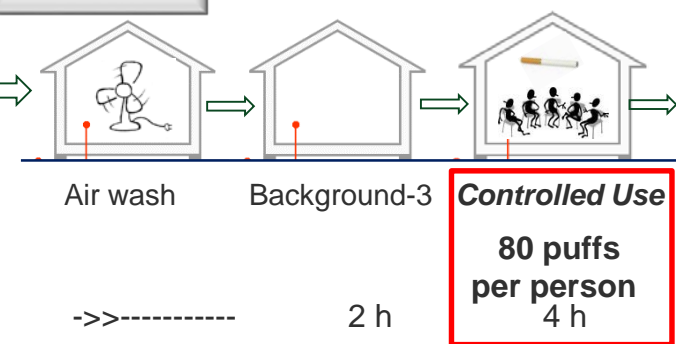

Altria


Altria Client Services

Controlled Use = 10 puffs, 5 sec puff duration every 30 mins


Altria Client Services | Jianmin Liu, M.D. | 69th TSRC | 21 SEP 2015 | 10

Sample Collection – M10 & GS

DAY 1

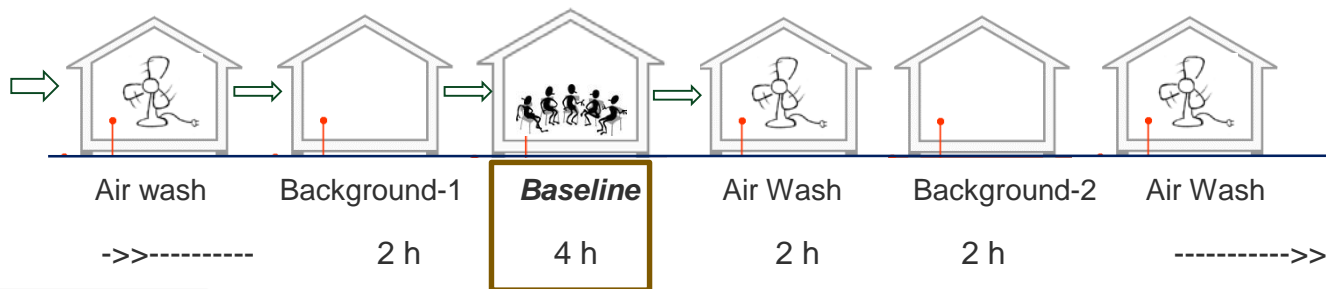


DAY 2

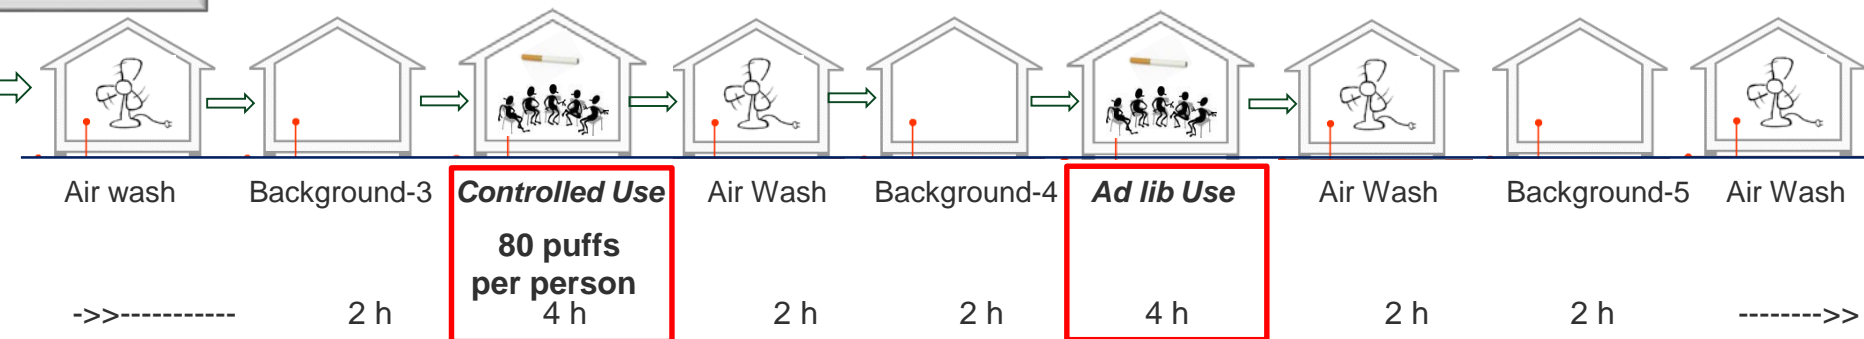

Sample Collection – Tank & Cig

DAY 1

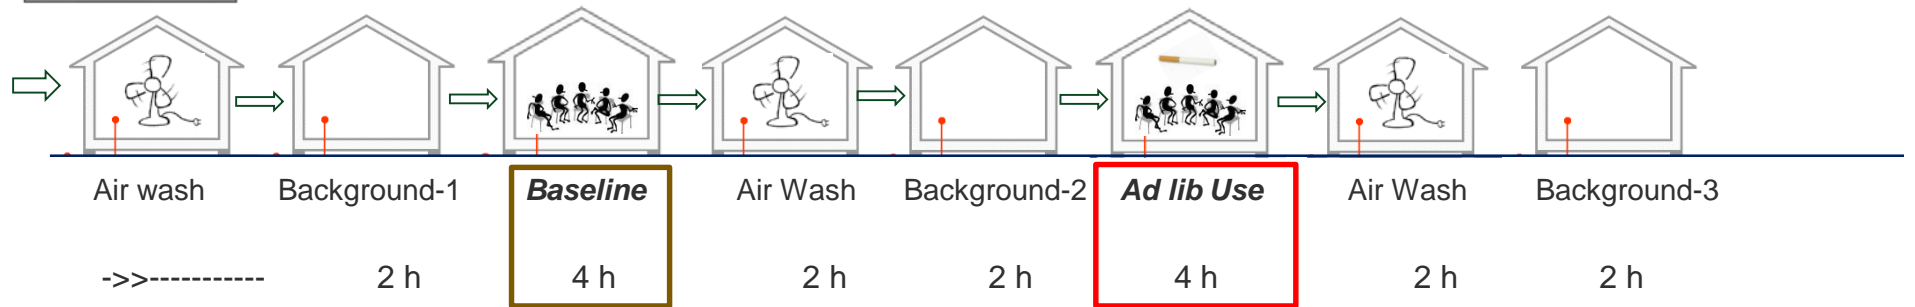

Altria

Altria Client Services

Ad Lib Use = Product use under naturalistic settings

Altria Client Services | Jianmin Liu, M.D. | 69th TSRC | 21 SEP 2015 | 12

Constituents Analyzed

Constituent	EBS	RAS	SS
Propylene glycol and glycerin (ISO 16200-1)			
nicotine	√	√	√
propylene glycol	√	√	√
glycerol	√	√	√
Carbonyl compounds (ISO 16000-3 & EPA TO-11A)			
formaldehyde	√	√	
crotonaldehyde		√	
o-tolualdehyde		√	
acetaldehyde	√	√	
butyraldehyde (butanal)		√	
m&p-tolualdehyde		√	
acetone		√	
benzaldehyde		√	
propionaldehyde		√	
isovaleraldehyde		√	
hexanaldehyde (aka hexaldehyde)		√	
valeraldehyde		√	
2, 5-dimethylbenzaldehyde		√	
methyl ethyl ketone (MEK)		√	
acrolein	√	√	

Constituent	EBS	RAS	SS
Volatile organic compounds (ISO-16000-6)			
1,3-butadiene		√	
benzene		√	
isoprene		√	
toluene		√	
furan		√	
ethylene oxide		√	
vinyl chloride		√	
propylene oxide		√	
nitromethane		√	
2-nitropropane		√	
vinyl acetate		√	
ethylbenzene		√	
Trace metals (EPA IO-2.1 & 3.5)			
arsenic		√	
cadmium		√	
chromium		√	
nickel		√	

EBS=Exhaled Breath Samples; RA= Room Air Samples; SS=Surface Samples

Constituents Analyzed


Constituent	EBS	RAS	SS
Propylene glycol and glycerin (ISO 16200-1)			
nicotine	√	√	√
propylene glycol	√	√	√
glycerin	√	√	√
Carbonyl compounds (ISO 16000-3 & EPA TO-11A)			
formaldehyde	√	√	
crotonaldehyde		√	
o-tolualdehyde		√	
acetaldehyde	√	√	
butyraldehyde (butanal)		√	
m&p-tolualdehyde		√	
acetone		√	
benzaldehyde		√	
propionaldehyde		√	
isovaleraldehyde		√	
hexanaldehyde (aka hexaldehyde)		√	
valeraldehyde		√	
2, 5-dimethylbenzaldehyde		√	
methyl ethyl ketone (MEK)		√	
acrolein	√	√	

Constituent	EBS	RAS	SS
Volatile organic compounds (ISO-16000-6)			
1,3-butadiene		√	
benzene		√	
isoprene		√	
toluene		√	
furan		√	
ethylene oxide		√	
vinyl chloride		√	
propylene oxide		√	
nitromethane		√	
2-nitropropane		√	
vinyl acetate		√	
ethylbenzene		√	
Trace metals (EPA IO-2.1 & 3.5)			
arsenic		√	
cadmium		√	
chromium		√	
nickel		√	

EBS=Exhaled Breath Samples; RA= Room Air Samples; SS=Surface Samples


Room Air Levels

Nicotine

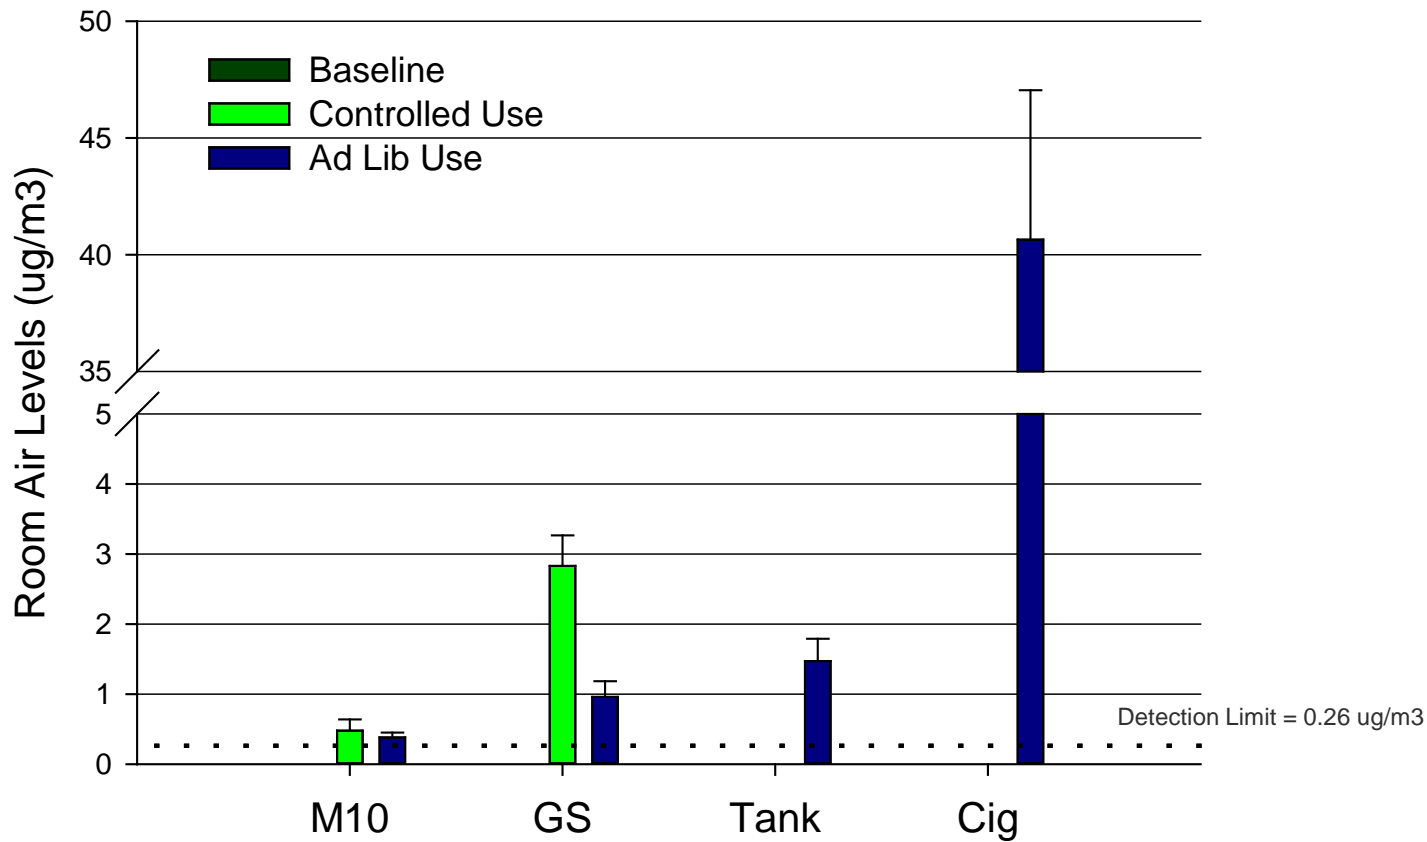

Room Air Levels

Nicotine

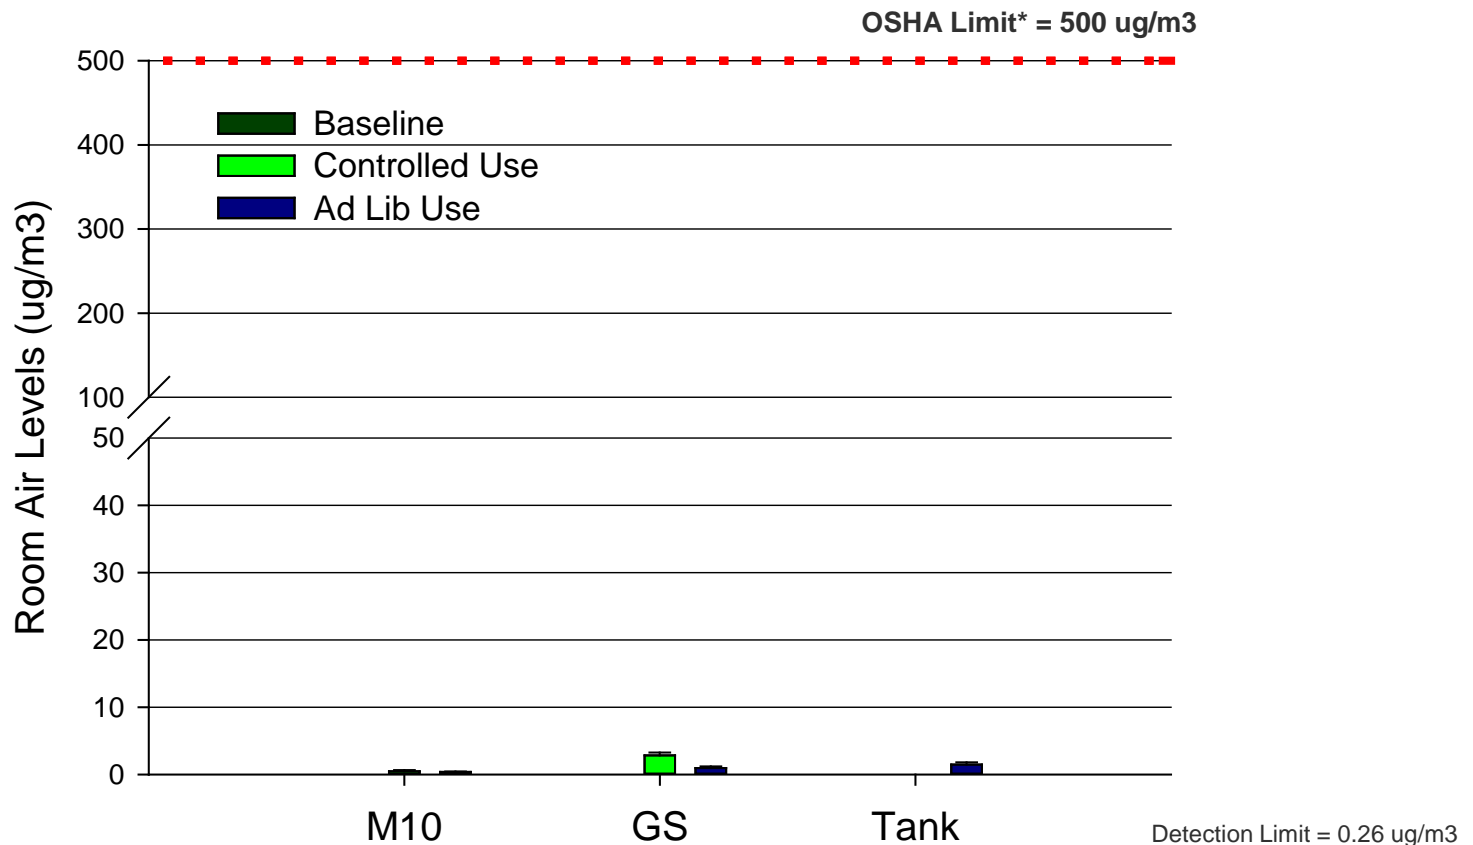

* Source: Occupational Safety and Health Administration Regulations (Standards – 29 CFR 1910.1000) Table Z-1 Limits for Air Contaminants Value shown as 8-hour time weighted average permissible exposure limit




Altria

Altria Client Services


Room Air Levels

Propylene Glycol

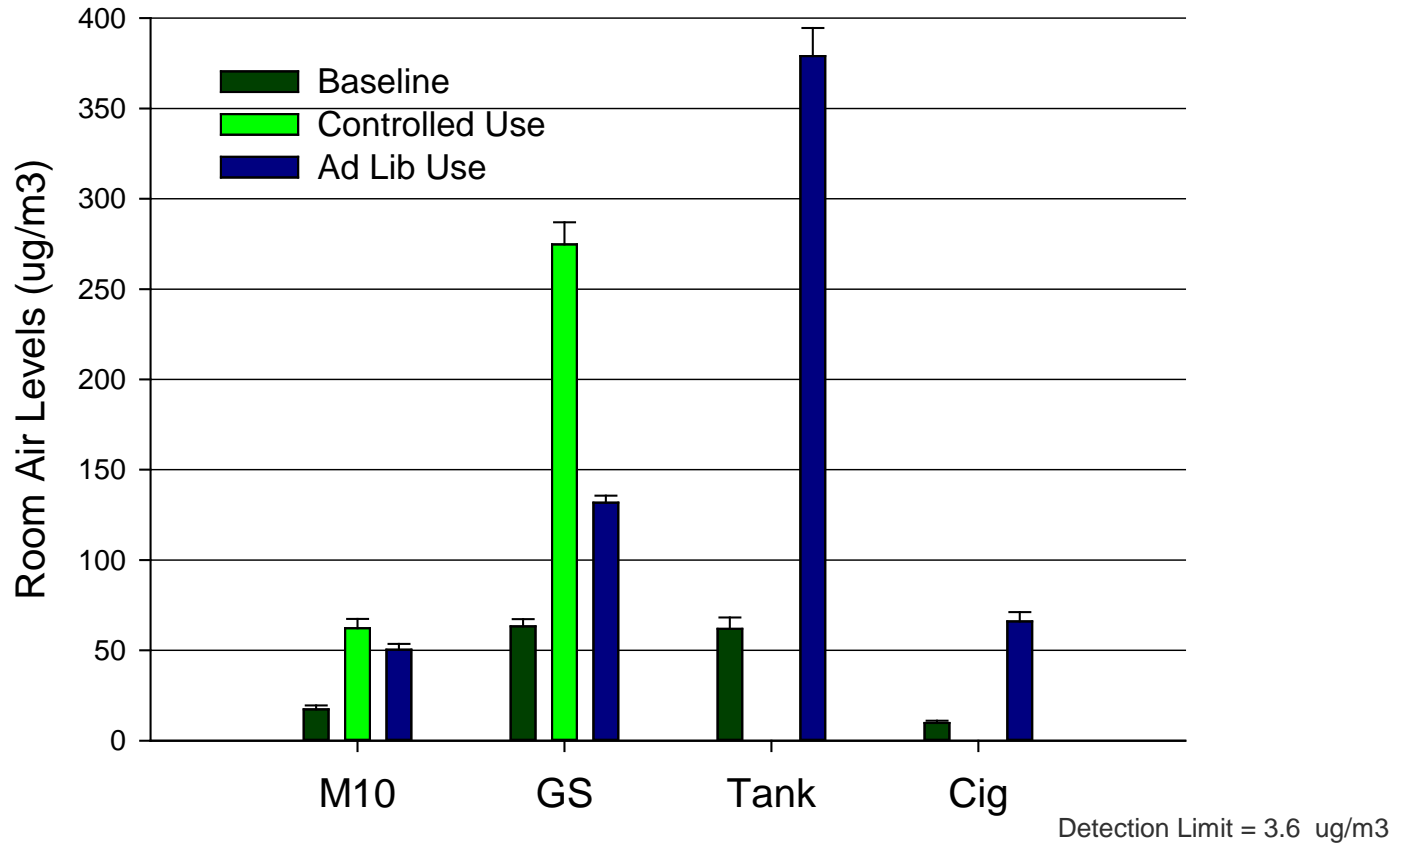

Room Air Levels


Propylene Glycol

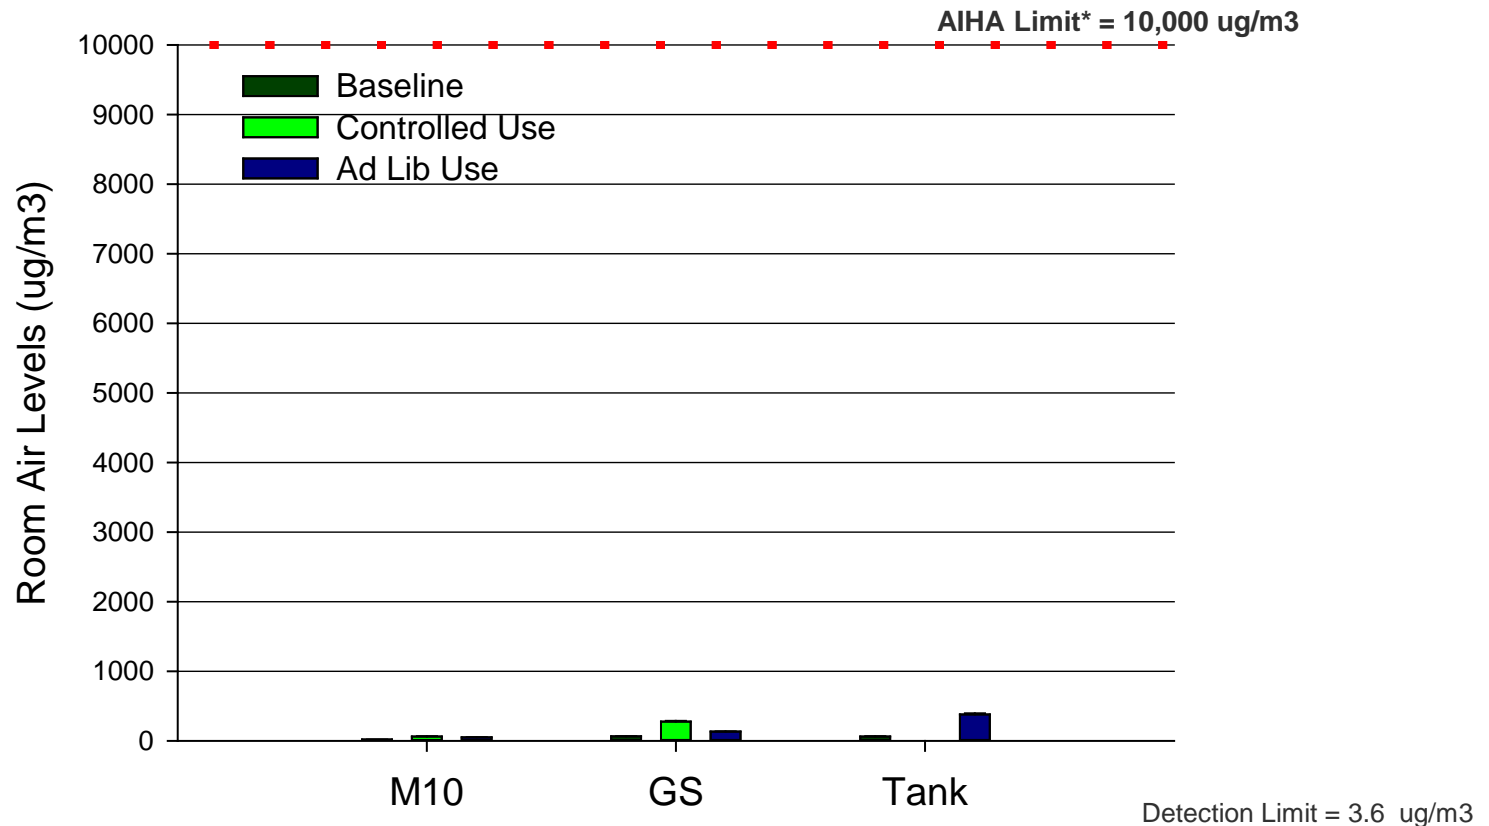

* Source: American Industrial Hygiene Association (AIHA) 2013 ERPG/WEEL Handbook
Value shown as 8-hour time weighted average permissible exposure limit


Room Air Levels

Glycerol

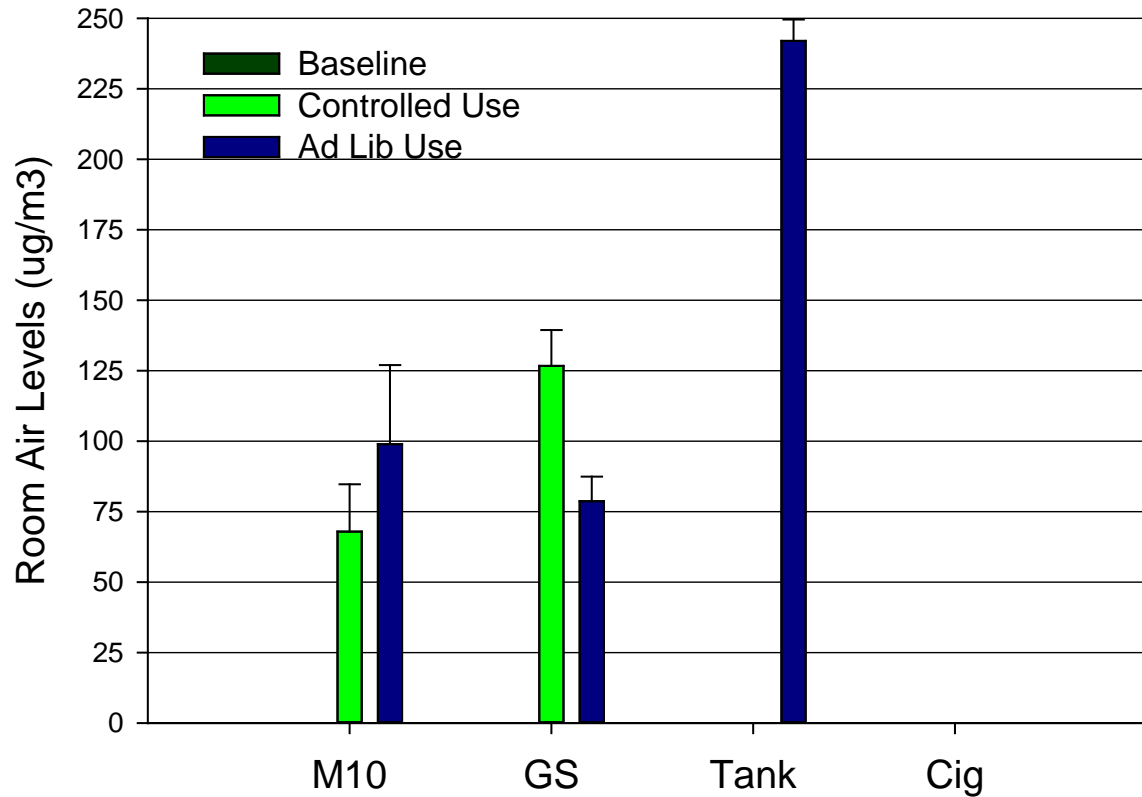

Detection Limit = 4.11 ug/m3

Room Air Levels

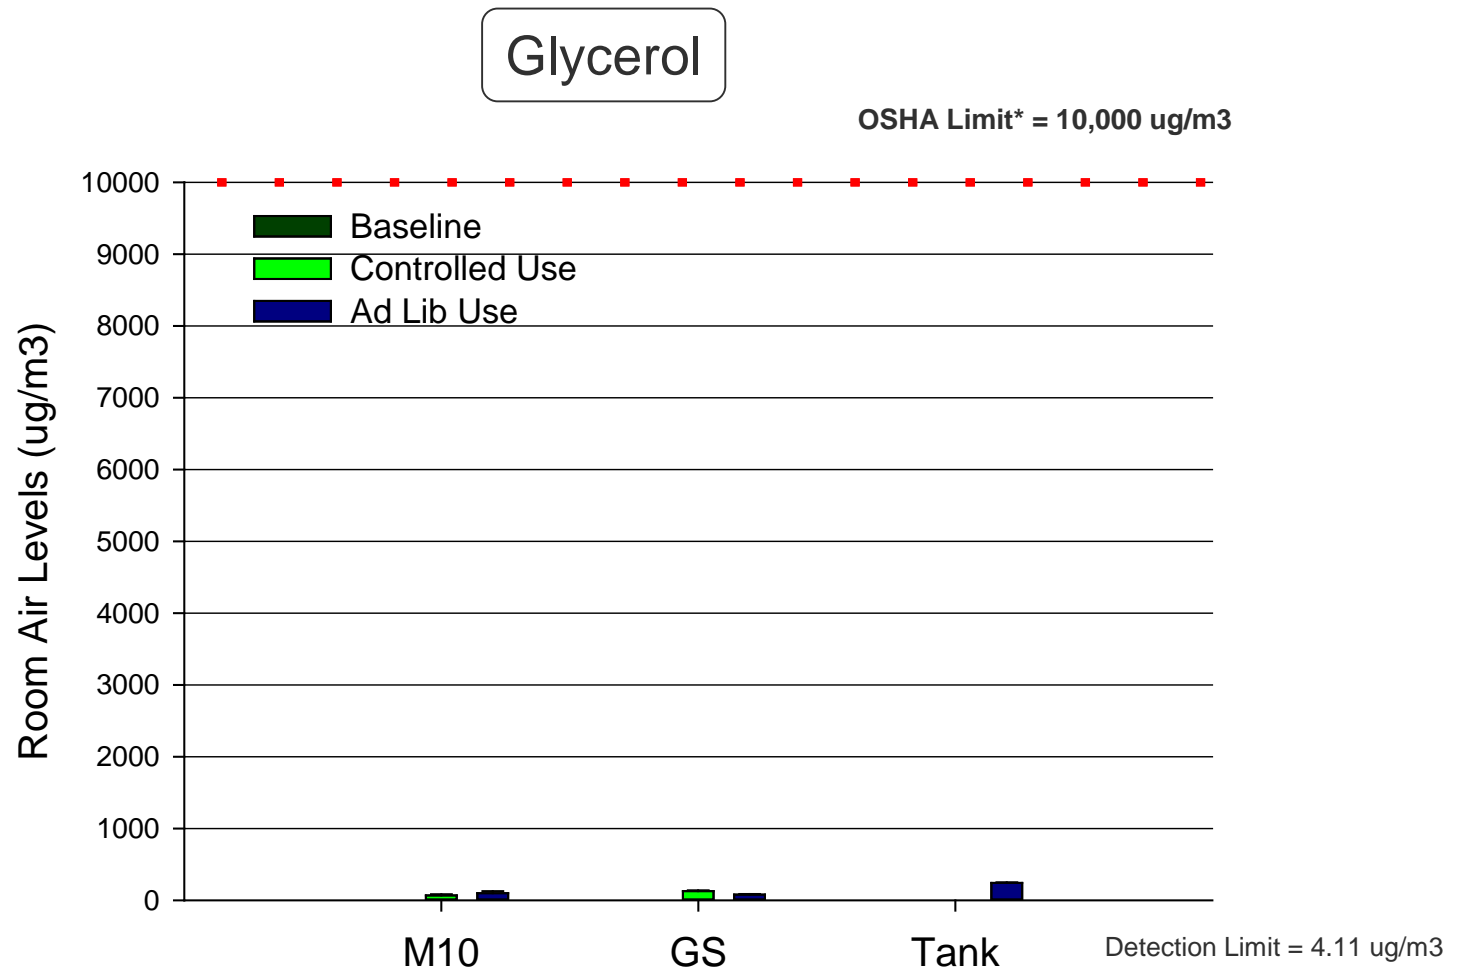

*Source: Occupational Safety and Health Administration Regulations (Standards – 29 CFR 1910.1000) Table Z-1 Limits for Air Contaminants
Value shown as 8-hour time weighted average permissible exposure limit




Altria

Altria Client Services


Room Air Levels

Formaldehyde (Background)

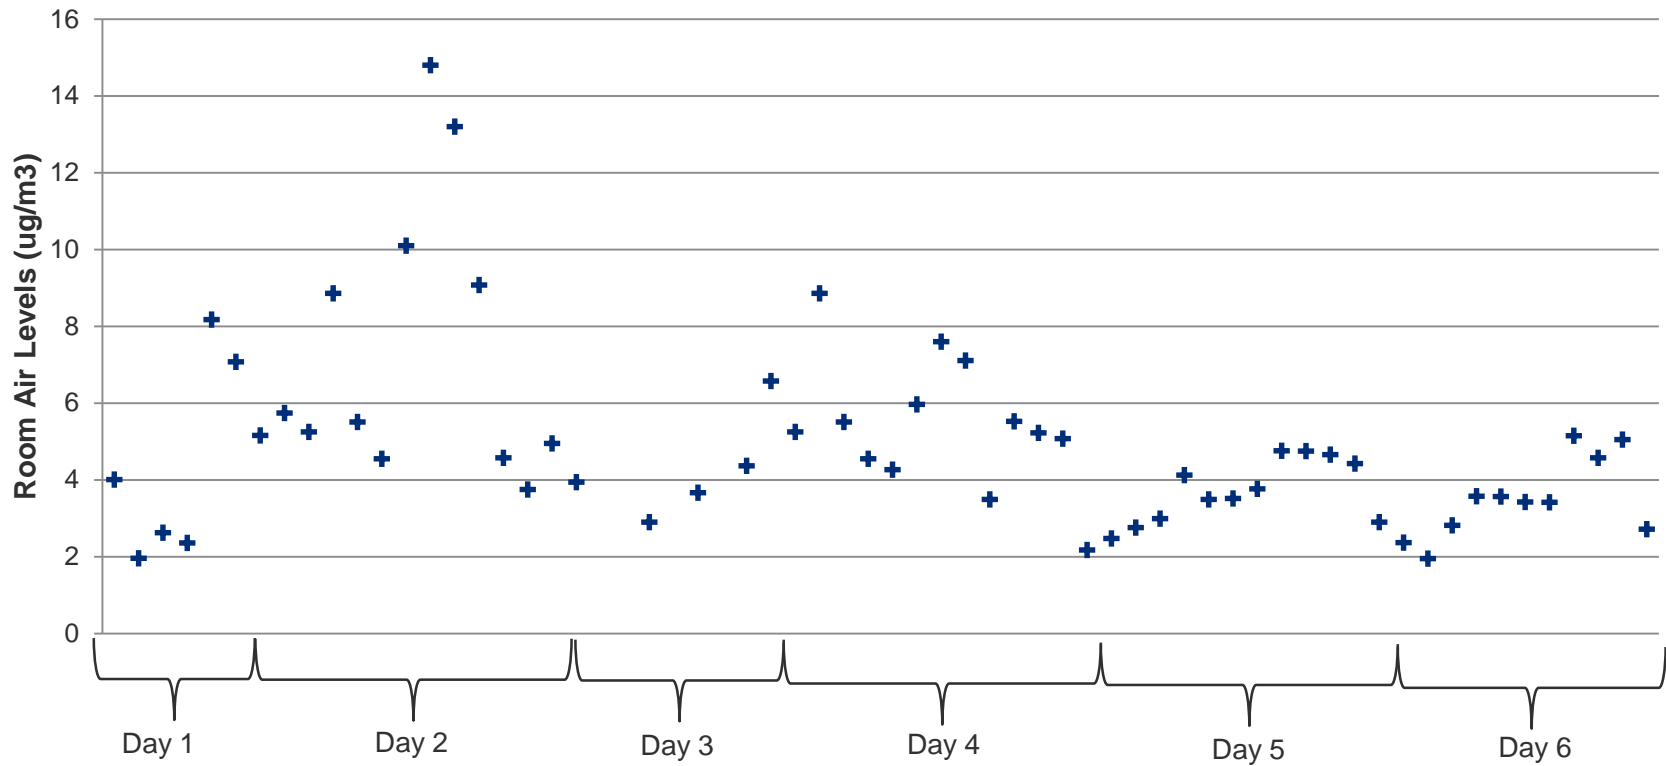

Room Air Levels

Formaldehyde (Test Groups)

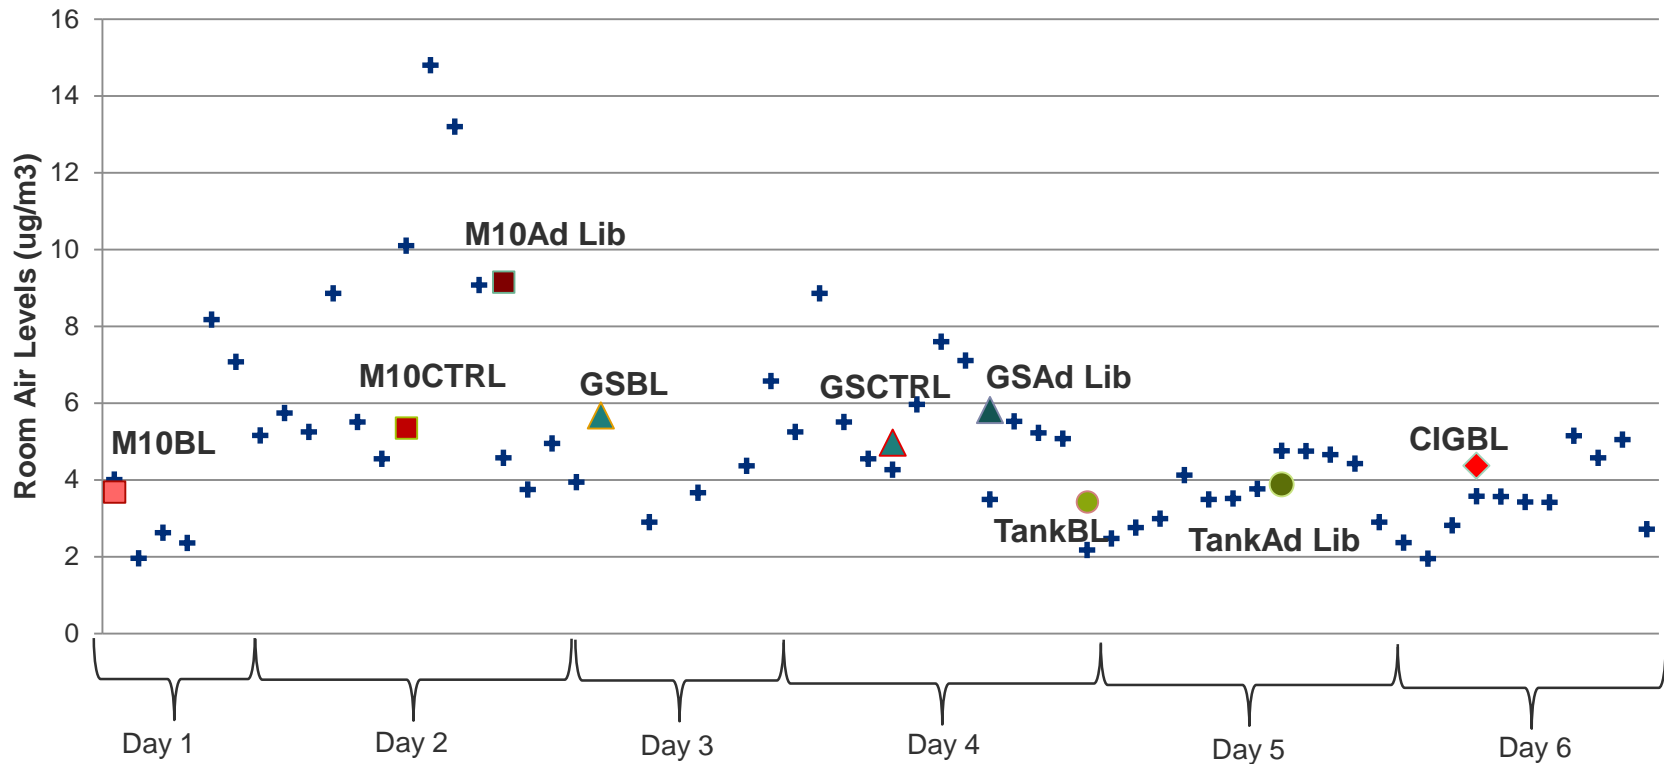

M10 = Mark-Ten® 2.5% Classic; GS = Prototype Electronic Cigarette 2.4%^A; Tank = Ego-T Tank and subjects' own e-liquids; CIG= Conventional cigarettes, subjects' own cigarettes ; BL=Baseline; CTRL=Controlled Use; Ad Lib = Ad lib use



Altria


Altria Client Services

^A Similar to commercial GreenSmoke® electronic cigarettes

Altria Client Services | Jianmin Liu, M.D. | 69th TSRC | 21 SEP 2015 | 22

Room Air Levels

Formaldehyde (Test Groups)

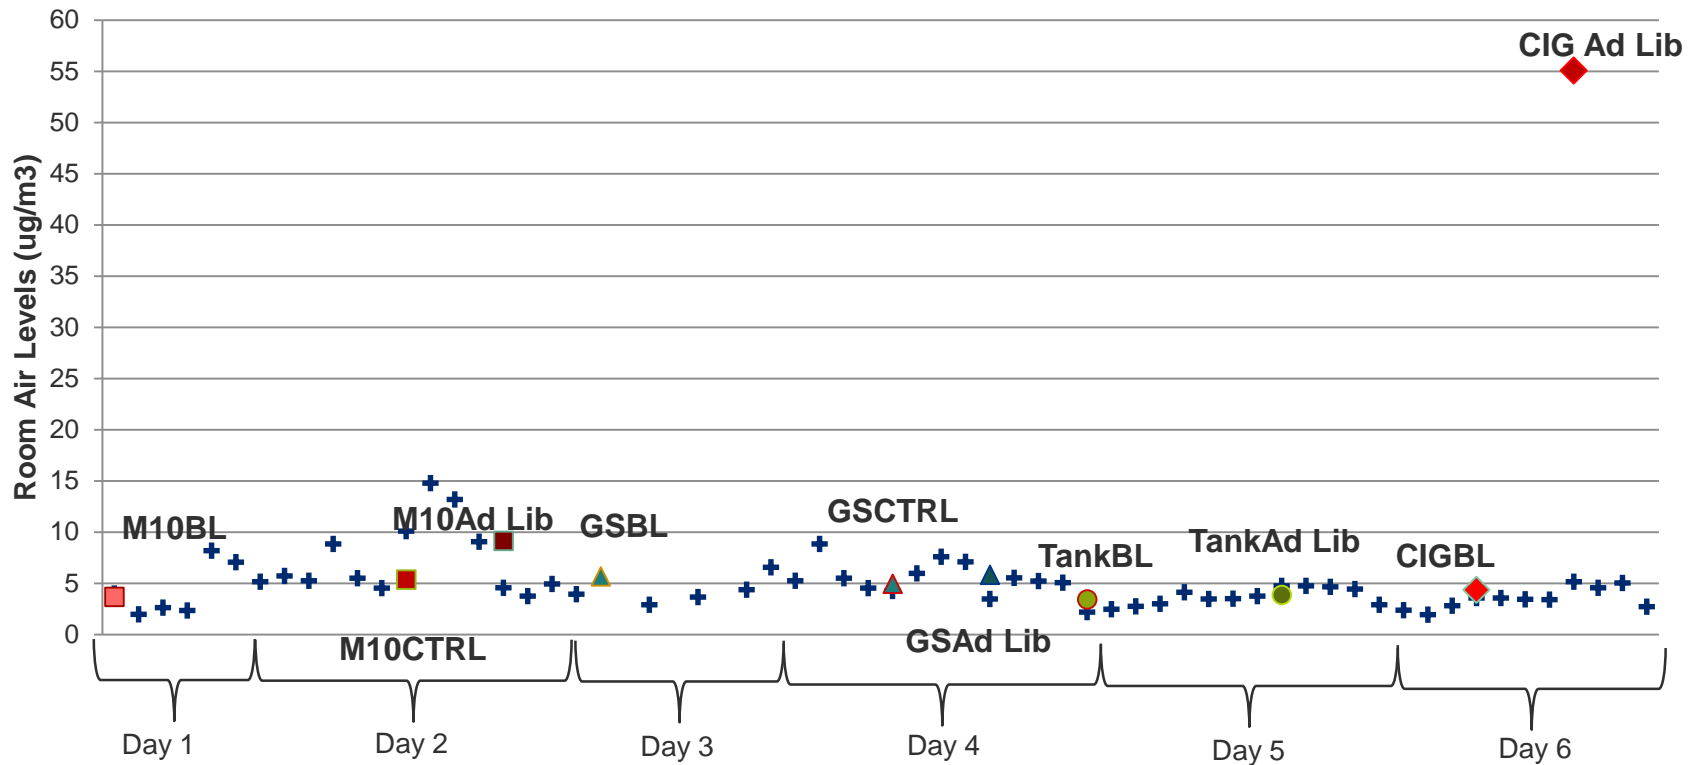

M10 = Mark-Ten® 2.5% Classic; GS = Prototype Electronic Cigarette 2.4%^A; Tank = Ego-T Tank and subjects' own e-liquids; CIG= Conventional cigarettes, subjects' own cigarettes ; BL=Baseline; CTRL=Controlled Use; Ad Lib = Ad lib use



Altria


Altria Client Services

^A Similar to commercial GreenSmoke® electronic cigarettes

Altria Client Services | Jianmin Liu, M.D. | 69th TSRC | 21 SEP 2015 | 23

Room Air Levels

Formaldehyde (Compared to Regulatory Limits)

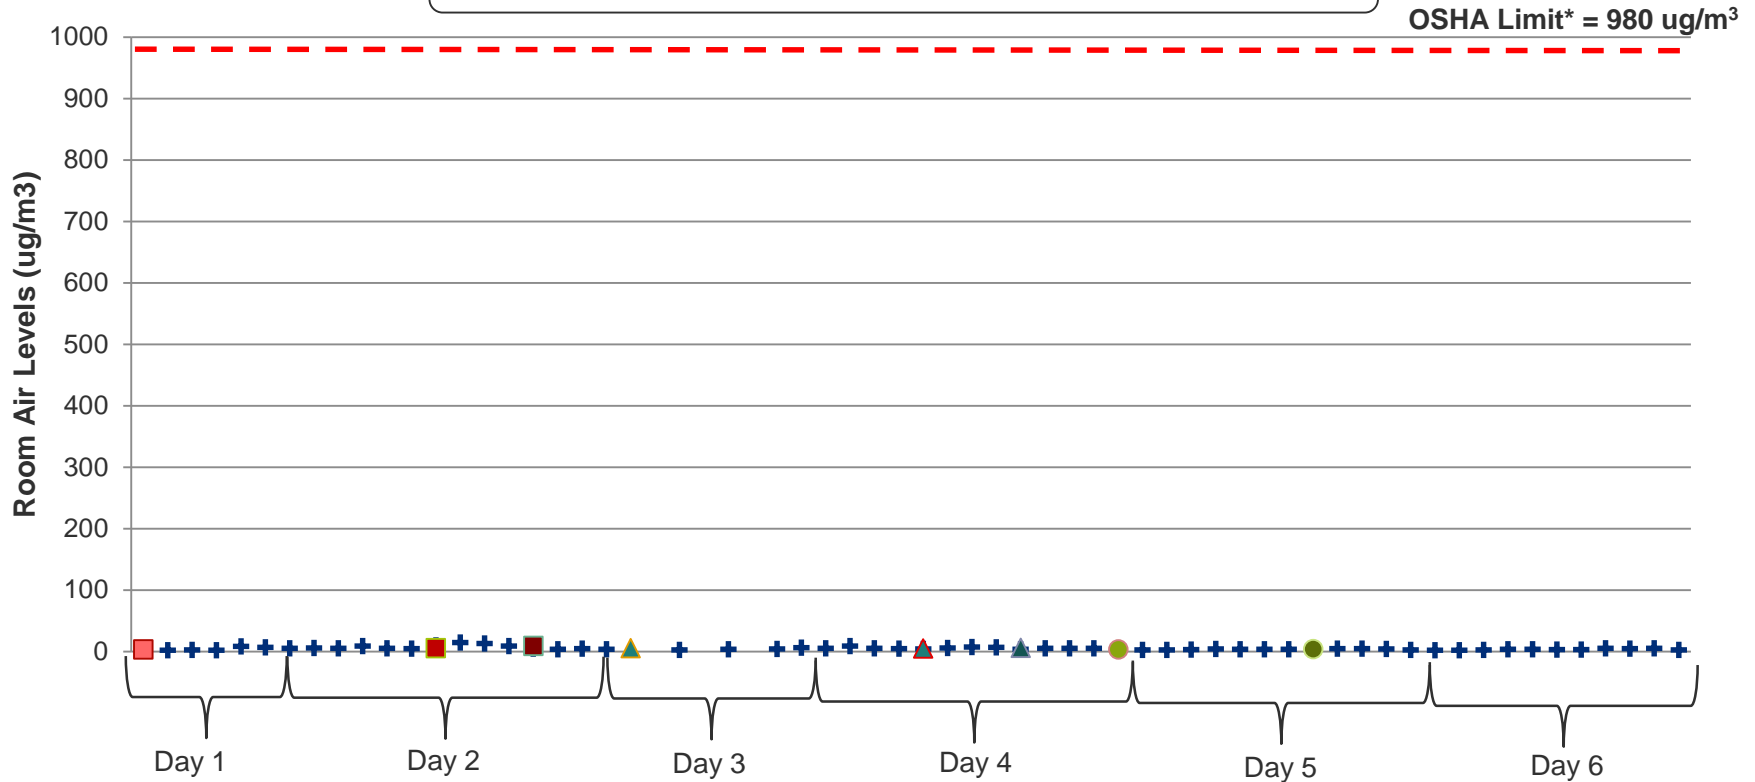


*Source: Occupational Safety and Health Administration Regulations (Standards – 29 CFR 1910.1000) Table Z-1 Limits for Air Contaminants
Value shown as 8-hour time weighted average permissible exposure limit



Altria


Altria Client Services

Sampling Stations

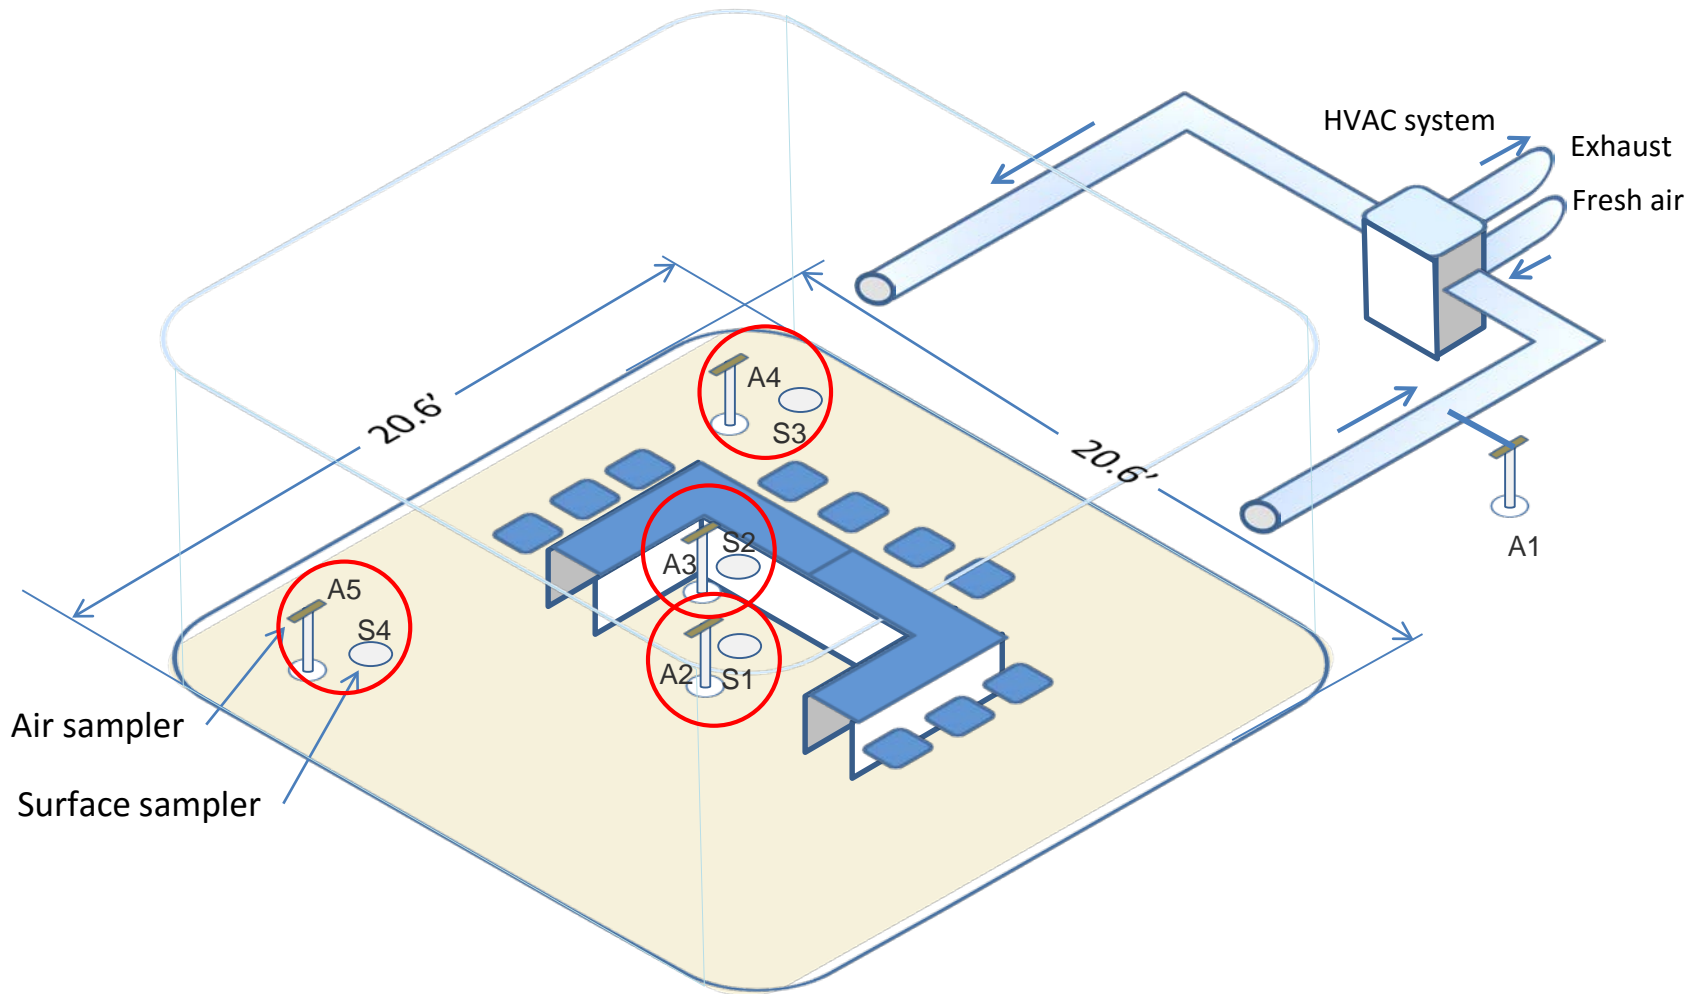

Surface Sample Levels

Nicotine

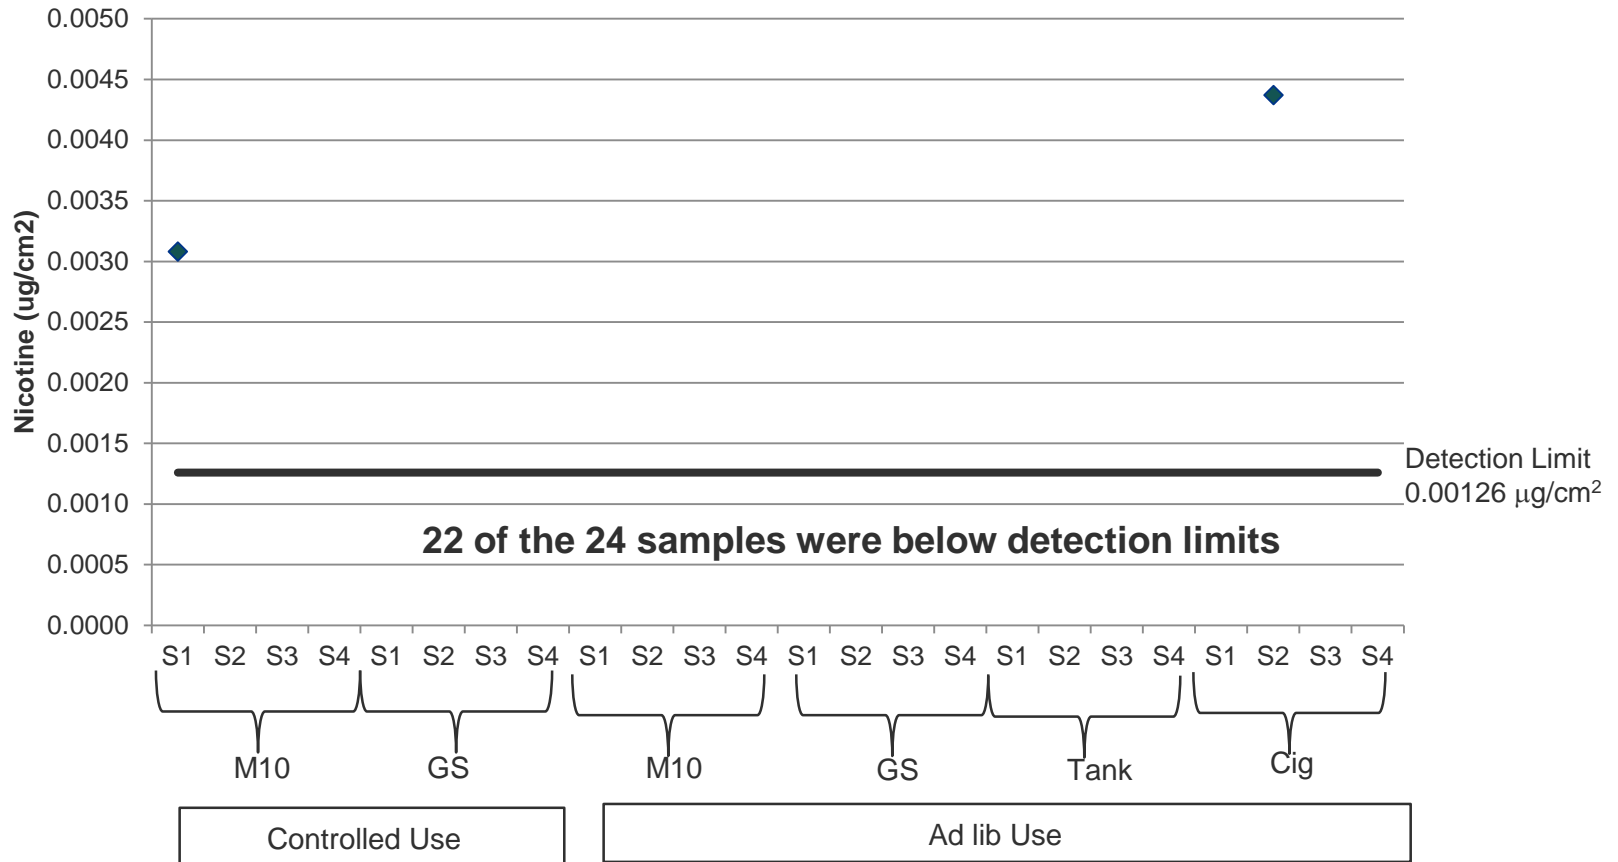

Conclusions

- Under study conditions with the products tested
 - Room air levels of constituents during the use e-vapor products were several fold below the current occupational regulatory and consensus limits^a
 - Surface sample results suggest that thirdhand exposure of non-users to nicotine is unlikely
- Further research is needed to determine the exposure to e-vapor constituents in non-users under different conditions of use and the potential for harm associated with this exposure

^a Workplace exposure limits to airborne contaminants set by Occupational Safety and Health Administration (OSHA) for Nicotine, Glycerol and Formaldehyde; American Industrial Hygiene Association (AIHA) for Propylene Glycol.

